



ADDENDUM NO. 1

03-04-09

To

BID #2009-013

Specifications

For

Roof Replacement

White House Building
Shakespeare Festival Theatre
Stratford, Connecticut

Architects Project No. 0903.02

SPECIFICATION CHANGES


1. Specification Section General Requirements, Part 1, 1.01, A., after item #4 insert the following words:

“5. There is no asbestos testing information for the existing roofing materials to be removed. Bidders are to assume that the existing roofing materials do contain asbestos. Contractors are to follow all local code requirements for proper disposal of all removed materials.

6. The two brick masonry chimneys are to be removed to the level of the roof and rebuilt with new brick that matches the existing brick in size, shape and construction and the new chimney is to match the existing chimney in size, shape, construction and step flashing. For purposes of bidding the each chimney is to be assumed to be 40 courses above the roof including the chimney cap and cross section 1'-8"x3'-8". The new chimneys are to include flue liner or liners to match the number and size of liners in the existing chimney.

7. All roof areas are to be replaced, refer to attached sketch SK2.28.09-2 for roof area locations, roof type and area or roof to be replaced to be used for the purposes of bidding.”

END ADDENDUM NO. 1

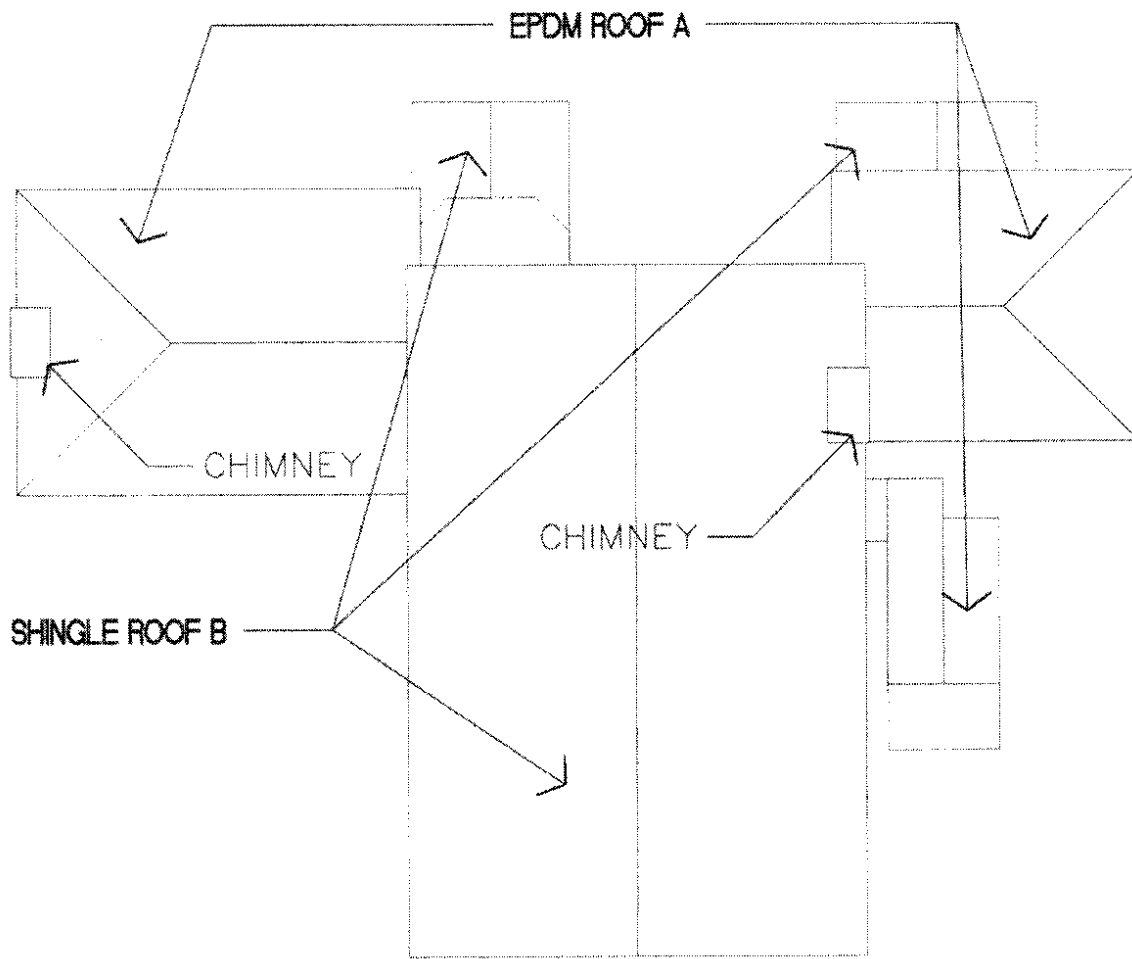

SHINGLE ROOF AREAS
 ROOFS--A 1,600 SF

EPDM ROOF AREAS
 ROOFS--B 900 SF

THE ROOF AREAS LISTED ABOVE ARE FOR THE PURPOSES OF BIDDING ONLY TO ESTABLISH PROJECT SCOPE. AREAS SHOWN ARE APPROX. AND BASED ON THE AVAILABLE DRAWINGS PROVIDED BY THE TOWN OF STRATFORD.

bostwick
 ARCHITECTS, LLC
 56 Arbor Street
 Hartford, CT 06106
 tel. 860.570.3889
 fax: 860.570.1318

architecture • interior design • environmental design
 © BOSTWICK ARCHITECTS, LLC

SUMMARY OF
 ROOF AREA

Project: ROOF REPLACEMENT-WHITE HOUSE BUILDING
 City State: TOWN OF STRATFORD, CT

02/28/09

Job #: 0903.00

SK2.28.09-2